

PlasticWood

Board Extrusion line

PlasticWood




APPLIED HI-TECH IN EXTRUSION

- Calendering system
- Calibrating system

Our **PLASTICWOOD** extrusion lines allow the production of **low density boards (0.5-0.7 gr/cm³)** that can be used in **substitution of natural wood**, thus having in addition the **main characteristics of the thermoplastic materials**, such as :

- » **fire resistance**
- » **insensibility to the atmospheric agents**
- » **mass colouring**

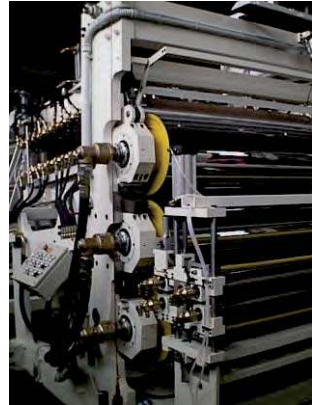

- **Width up to 2.4mt**
- **Monolayer & Coex**

Actually the end product obtainable by means of our **PLASTICWOOD** extrusion lines is a **real synthetic wood** item which contributes to **limit some of the main causes determining the spoiling of our ecosystem**, such as **deforestation**.

